


Quick Installation

Model TFF-12



Model TFF-12 replaces motor driven flashers in minutes. It utilizes a quick connect terminal strip and fused outputs, supplied with ABC-10. This unit incorporates any of the Electro Systems flashers and is supplied with cut outs for centre hole or cabinet mounting. Dimensions: 4"W x 4.5"D x 1.5"H

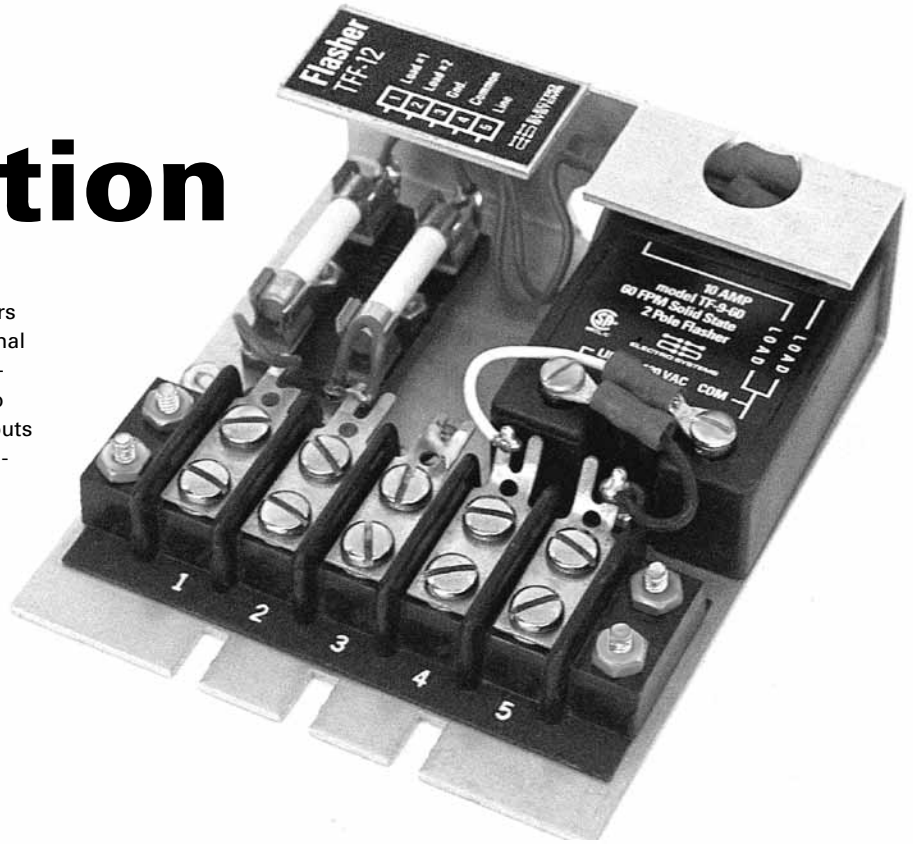

Model TF-9-60 – 2 Pole Flasher Model TF-9A-60 – 1 Pole Flasher

10 amp @ 120 VAC
60 FPM \pm .1%
-45°C to +85°C
Zero voltage on, zero current off
DV/DT 200v/ μ sec.
Built in snubbers
Leakage current: 6ma max.

Flashers below shown actual size. Dimensions: 1.75" x 2.25" x .875". Models with different flash rates also available.

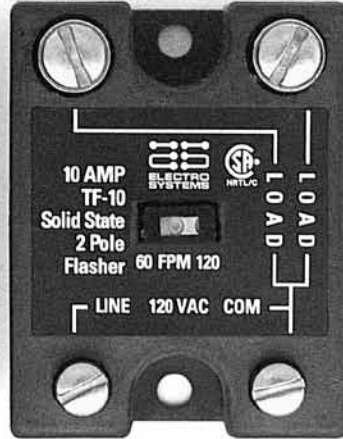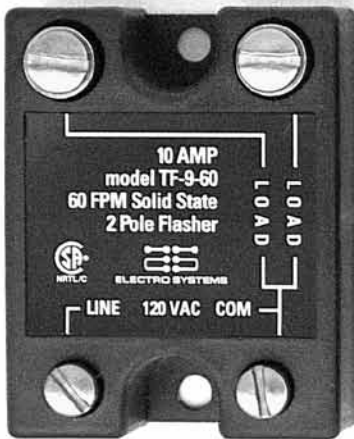

Model TF-10 – 2 Pole Flasher Model TF-10A – 1 Pole Flasher

10 amp @ 120 VAC
60 or 120 FPM \pm .1% (slide switch)
-45°C to +85°C
Zero voltage on, zero current off
DV/DT 200v/ μ sec.
Built in snubbers
Leakage current: 6ma max.



Canada: Electro Systems Inc.
#8-415 Dunedin Street
Victoria, BC, Canada V8T 5G8
Tel: 250.385.0911
toll free: 1.800.668.2254
Fax: 250.385.0733
toll free: 1.800.661.4977